




GSM / GPRS / GNSS / Bluetooth HAT für Raspberry Pi

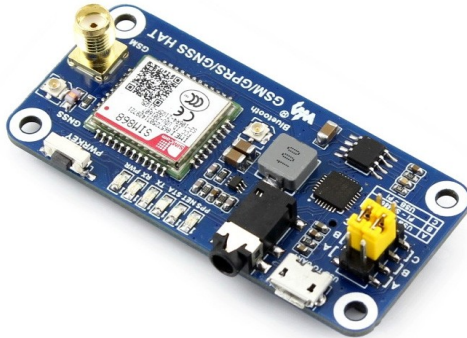

Artikel-Nr.:	RPI-GSMHAT
Hersteller:	Waveshare
Herkunftsland:	China
Zolltarifnummer:	85176200
Gewicht:	0.129 kg

Übersicht

This is a handy, low power Raspberry Pi HAT which features multi communication functionalities: GSM, GPRS, GNSS and Bluetooth. It allows your Pi to easily make a telephone call, send messages, connect to wireless Internet, global position, transfer data via Bluetooth, and so on.

Eigenschaften

General

- Raspberry Pi connectivity, compatible with Raspberry Pi 2B/3B/Zero/Zero W
- Supports SMS, phone call, GPRS, DTMF, HTTP, FTP, MMS, email, etc.
- Support GPS, COMPASS, Glonass, LBS base station positioning, omni-positioning
- Bluetooth 3.0, supports data transferring through Bluetooth
- Onboard USB TO UART converter CP2102 for UART debugging
- 6x LEDs for indicating the module working status
- SIM card slot for 1.8V/3V SIM card
- RTC with backup battery holder
- Baudrate auto detection (1200bps ~115200bps)
- Control via AT commands (3GPP TS 27.007, 27.005, and SIMCOM enhanced AT Commands)
- Supports SIM application toolkit: GSM 11.14 Release 99
- Comes with development resources and manual (examples for Raspberry Pi/Arduino/STM32)

GSM/GPRS

- Band
 - GSM 850/EGSM 900/DCS 1800/PCS 1900 MHz
 - Quad-band auto search
 - Compliant to GSM phase 2/2+
- Emitting power
 - Class 4 (2W @ GSM 850/EGSM 900 MHz)
 - Class 1 (1W @ DCS 1800/PCS 1900 MHz)
- GPRS connectivity
 - GPRS multi-slot class 12 (default)
 - GPRS multi-slot class 1~12 (configurable)
 - GPRS data feature
 - Downlink speed: max 85.6kbps
 - Uplink speed: max 85.6kbps



- Coding schemes: CS-1CS-2CS-3CS-4
- Supports PAP (Password Authentication Protocol) for PPP connection
- Supports PBCCH
- Supports USSD
- SMS
 - Supports: MT/MO/CB/Text/PDU mode
 - SMS storage: SIM card
- Audio
 - Voice encode/decode mode: Half RateFull RateEnhanced Full RateAdaptive muti rate
 - Supports echo cancellation
 - Supports noise reduction

GNSS

- Receiver type
 - 33 tracking channels
 - 99 acquisition channels
 - GPS L1 C/A code
- Sensitivity
 - Tracking: -165 dBm
 - Cold starts : -148 dBm
- Time-To-First-Fix
 - Cold starts : 28s (typ.)
 - Hot starts : < 1s
 - Warm starts: 26s
- Accuracy
 - Horizontal position : <2.5m CEP

Bluetooth

- Integrates AT commands
 - Compliant to Bluetooth specification 3.0 + EDR
 - Supports SPP, OPP, HFP/HSP, etc.

Misc

- Operating voltage: 5V
- Operating temperature: -40°C ~ 85°C
- Storage temperature: -45°C ~ 90°C
- Dimensions: 30.2mm x 65mm


Lieferumfang

- GSM/GPRS/GNSS HAT x1
- GSM Antenna x1
- GPS External Antenna (B) x1
- Bluetooth Antenna x1
- USB type A plug to micro plug cable x1
- RPi screws pack (2pcs) x1

Dokumentation / Downloads

- https://www.waveshare.com/wiki/GSM/GPRS/GNSS_HAT

Weitere Bilder:



- 1. 100MHz antenna
- 2. 100MHz antenna
- 3. 100MHz antenna
- 4. 100MHz antenna
- 5. 100MHz antenna
- 6. 100MHz antenna
- 7. 100MHz antenna
- 8. 100MHz antenna
- 9. 100MHz antenna
- 10. 100MHz antenna
- 11. 100MHz antenna
- 12. 100MHz antenna
- 13. 100MHz antenna
- 14. 100MHz antenna
- 15. 100MHz antenna
- 16. 100MHz antenna
- 17. 100MHz antenna
- 18. 100MHz antenna
- 19. 100MHz antenna
- 20. 100MHz antenna
- 21. 100MHz antenna
- 22. 100MHz antenna
- 23. 100MHz antenna
- 24. 100MHz antenna
- 25. 100MHz antenna
- 26. 100MHz antenna
- 27. 100MHz antenna
- 28. 100MHz antenna
- 29. 100MHz antenna
- 30. 100MHz antenna
- 31. 100MHz antenna
- 32. 100MHz antenna
- 33. 100MHz antenna
- 34. 100MHz antenna
- 35. 100MHz antenna
- 36. 100MHz antenna
- 37. 100MHz antenna
- 38. 100MHz antenna
- 39. 100MHz antenna
- 40. 100MHz antenna
- 41. 100MHz antenna
- 42. 100MHz antenna
- 43. 100MHz antenna
- 44. 100MHz antenna
- 45. 100MHz antenna
- 46. 100MHz antenna
- 47. 100MHz antenna
- 48. 100MHz antenna
- 49. 100MHz antenna
- 50. 100MHz antenna
- 51. 100MHz antenna
- 52. 100MHz antenna
- 53. 100MHz antenna
- 54. 100MHz antenna
- 55. 100MHz antenna
- 56. 100MHz antenna
- 57. 100MHz antenna
- 58. 100MHz antenna
- 59. 100MHz antenna
- 60. 100MHz antenna
- 61. 100MHz antenna
- 62. 100MHz antenna
- 63. 100MHz antenna
- 64. 100MHz antenna
- 65. 100MHz antenna
- 66. 100MHz antenna
- 67. 100MHz antenna
- 68. 100MHz antenna
- 69. 100MHz antenna
- 70. 100MHz antenna
- 71. 100MHz antenna
- 72. 100MHz antenna
- 73. 100MHz antenna
- 74. 100MHz antenna
- 75. 100MHz antenna
- 76. 100MHz antenna
- 77. 100MHz antenna
- 78. 100MHz antenna
- 79. 100MHz antenna
- 80. 100MHz antenna
- 81. 100MHz antenna
- 82. 100MHz antenna
- 83. 100MHz antenna
- 84. 100MHz antenna
- 85. 100MHz antenna
- 86. 100MHz antenna
- 87. 100MHz antenna
- 88. 100MHz antenna
- 89. 100MHz antenna
- 90. 100MHz antenna
- 91. 100MHz antenna
- 92. 100MHz antenna
- 93. 100MHz antenna
- 94. 100MHz antenna
- 95. 100MHz antenna
- 96. 100MHz antenna
- 97. 100MHz antenna
- 98. 100MHz antenna
- 99. 100MHz antenna
- 100. 100MHz antenna

